



DENSTRON

UREADY 4RU MONITOR


A 4RU 19" rack mount ready TFT display with capacitive touch for Broadcast applications.

Used for signal and picture monitoring, or a control system with the help of multi-touch PCT, or a combination of both.

Denstron provides a 16.9" with a resolution of 1920 x 624, which allows multiple video picture monitor and audio level displays to be presented side-by-side.

Projected Capacitive Touch functionality allows the device to be interactive common signal interfaces, such as: Display Port, DVI and VGA are used for video signals; and USB for touch screen.

UReady™ 

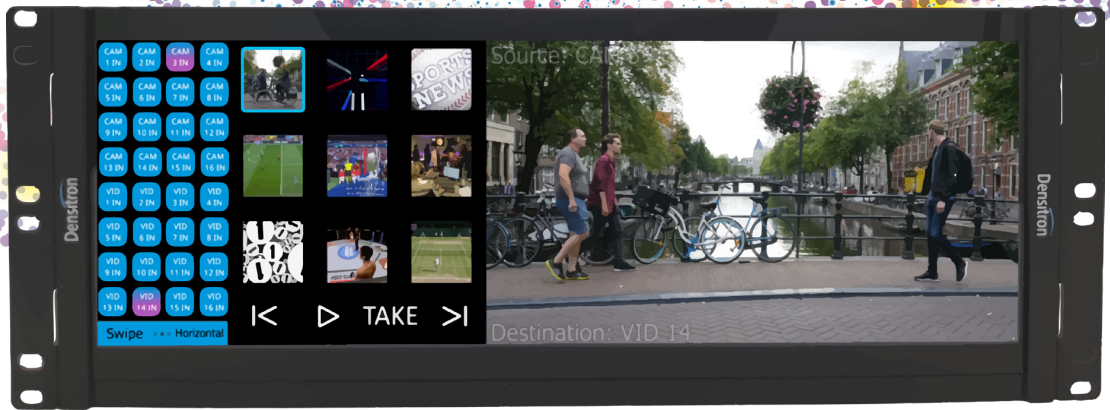

UREADY

4RU MONITOR

SKU: DM-169GN-MPGR01

Denstron 16.9" monitor with a resolution of 1920 x 624

DISPLAY

Display size	16.9"
Resolution	1920 X 624
Viewing Angle	85/85/85/85

Available with the following customisation options:



Cover Lens
Customisation



Optical Bonding



Tactile Technology



Mechanical buttons

DIMENSIONS

Width	482.6mm
Height	88.00mm

HMI

HMI	Tactile Rotary
Touch Interface	PCAP

MOUNTING AND CONNECTIVITY

I/O	DVI-D, DP, VGA
Mechanical Mounting	Rack Product

DENSITRON



IDEAL

sales@idealsys.com



PANEL

Size	16.9" TFT LCD
Pixels per inch	119
Brightness	700 cd/m ²
Contrast Ratio	1000:1
LED Backlight	50,000 Hours
Power	1 x 12V DC Input
Operating Temperature	0°C ~ +40°C

TOUCH

Type	PCT
Fingers	Fingers Multiple touch >10